



3PC DIRECT-MOUNT AUTOMATION SERIES

3PC DM300 Econoflo Series



Models:

#DM310 - Threaded Ends

#DM320 - Socket-Weld Ends

Optional: SS Body with Carbon Steel End Connections

Valve Features

- 3-Piece Body, Full Port Design
- 1/4" to 4" Sizes
- Threaded or Socket-Weld Ends
- Body: CF8M, 316SS
- PTFE, RTFE or TFM Seats
- Pressure Rating:
1000 PSI
- Temperature Range:
-20° F - 450° F

Design Advantages

- ISO 5211 Direct Mounting Pad - Provides for precise shaft alignment & eliminates the need for brackets and couplings
- 3-Piece Swing Out Design for easy maintenance
- Improved Seat Material - Extends cycle life and reduces torque
- Blowout Proof Stem
- Anti-Static Device - Standard in all sizes
- Locking Device standard for valves with handles
- Adjustable "Live Loaded" Stem Seal


Actuator Sizing Chart

Flo-Tite Actuator Selections are based on units with standard seats with clean fluid only at ambient temperature.

Maximum Temperature Limitations for Direct-Mount Actuators: Electric 150° F; Pneumatic 180° F.

Special Brackets are available for higher temperatures, consult factory.

All valves are sized for line pressure up to maximum 600 WOG. For higher line pressure applications, consult factory to assure proper actuator sizing.

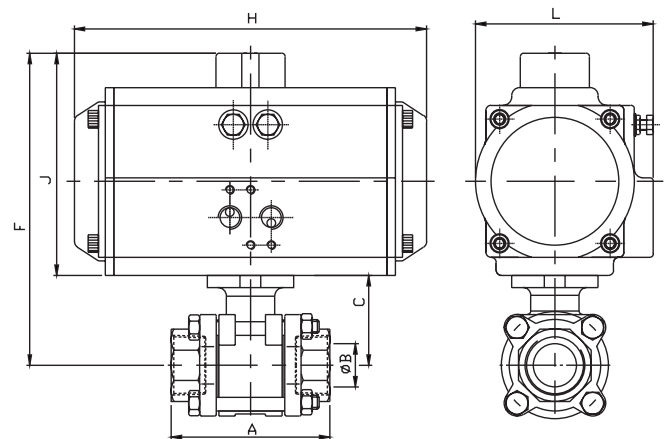


SIZE	A	B	C	SPRING RETURN 80 PSI				SPRING RETURN 60 PSI				DOUBLE ACTING 80 PSI				DOUBLE ACTING 60 PSI							
				Actuator	F	H	J	L	Actuator	F	H	J	L	Actuator	F	H	J	L	Actuator	F	H	J	L
1/2"	2.76	0.59	1.65	SR52	5.27	5.79	3.62	2.81	SR52	5.27	5.79	3.62	2.81	DA40	4.80	4.81	3.15	2.57	DA40	4.80	4.81	3.15	2.57
3/4"	3.15	0.79	1.77	SR52	5.39	5.79	3.62	2.81	SR52	5.39	5.79	3.62	2.81	DA52	5.39	5.79	3.62	2.81	DA52	5.39	5.79	3.62	2.81
1"	3.54	1.00	2.05	SR63	6.28	6.61	4.23	3.27	SR75	6.75	7.24	4.70	3.74	DA52	5.67	5.79	3.62	2.81	DA52	5.67	5.79	3.62	2.81
1 1/2"	4.72	1.50	2.69	SR75	7.39	7.24	4.70	3.74	SR83	7.76	8.03	5.07	4.05	DA63	6.92	6.61	4.23	3.27	DA75	7.39	7.24	4.70	3.74
2"	5.51	1.97	3.13	SR83	8.20	8.03	5.07	4.05	SR92	8.52	10.31	5.39	4.27	DA75	7.83	7.24	4.70	3.74	DA83	8.20	8.03	5.07	4.05

Flo-Tite's "DM" design eliminates mounting brackets and all their possible related problems. Ideally designed for low profile, cost effective industrial applications.

Design and Technical Data

Standards
ANSI/ASME - B16.11
ISO - 5211
MSS - SP25, SP72

Models
Threaded - DM310
Socket - Weld - DM320

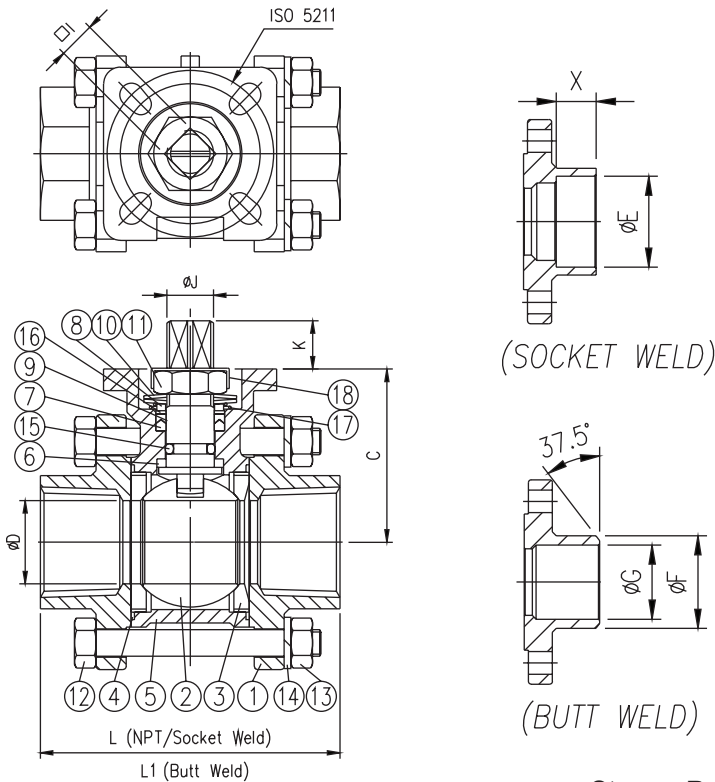

Materials of Construction


ITEM	DESCRIPTION	DM300
1	End Cap	ASTM A351-CF8M
2	Ball	ASTM A351-CF8M/316
3	Seat	PTFE/RPTFE/TFM-1600
4	Gasket	PTFE
5	Body	ASTM A351-CF8M
6	Thrust Washer	PTFE
7	Stem Packing	PTFE
8	Packing Follower	AISI 304
9	Stem	ASTM A276-316
10	Belleville Washer	AISI 301
11	Packing Nut	AISI 304
12	Bolt	AISI 304
13	Bolt Nut	AISI 304
14	Bolt Washer	AISI 304
15	O-Ring	VITON
16	Packing Protector	CARBON 25% PTFE
17	Anti-Static	AISI 301
18	Lock Washer	AISI 304

Steam Rating 150 PSI WSP
175 PSI available with SuperTek
II seats. Consult Factory

Vacuum Service to 20 microns

Dimensions and Weights


SIZE	C	ØD	E	F	G	I	J	K	L	L1	X	Cv	Torque In-Lb	Weight Lb	ISO 5211 Pattern
1/4"	1.65	0.41	0.56	0.57	0.39	0.35	0.47	0.35	2.76	2.76	0.39	7	50	0.85	F03-F04
3/8"	1.65	0.49	0.69	0.72	0.53	0.35	0.47	0.35	2.76	2.76	0.39	10	50	0.84	F03-F04
1/2"	1.65	0.59	0.86	0.88	0.66	0.35	0.47	0.35	2.76	2.80	0.51	15	55	1.43	F03-F04
3/4"	1.77	0.79	1.07	1.09	0.87	0.35	0.47	0.35	3.15	3.23	0.59	35	70	1.85	F03-F04
1"	2.05	0.98	1.33	1.37	1.09	0.43	0.55	0.55	3.54	3.62	0.59	68	100	2.91	F04-F05
1 1/4"	2.30	1.26	1.68	1.70	1.42	0.43	0.55	0.55	4.13	4.33	0.59	110	190	3.92	F04-F05
1 1/2"	2.69	1.50	1.92	1.94	1.65	0.55	0.75	0.71	4.72	5.00	0.63	155	390	5.42	F05-F07
2"	3.13	1.97	2.41	2.42	2.11	0.55	0.75	0.71	5.51	6.14	0.67	300	480	8.16	F05-F07
2 1/2"	4.13	2.56	2.91	2.95	2.54	0.67	0.94	0.87	6.61	7.32	0.67	500	735	18.8	F07-F10
3"	4.57	3.15	3.54	3.54	3.10	0.67	0.94	0.87	7.60	8.58	0.67	750	800	28.6	F07-F10
4"	5.33	3.94	4.54	4.55	4.06	0.87	1.10	1.18	9.09	10.43	0.79	1015	1410	47.8	F10-F12

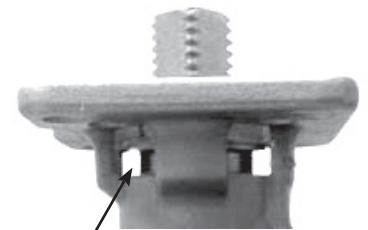

Leak Detection Window Prevents actuator damage in the unlikely event of stem leakage

Stem Seal Design

Flo-Tite's triple stem seal detail provides for an extended valve cycle life. The primary seal is a seal ring that fits firmly on a flat portion of the stem shoulder. The secondary (back-up) seal is provided by an O-ring and a set of Vee packing rings, energized by belleville washers. This design adjusts packing compression to compensate for wear, pressure or temperature fluctuations.

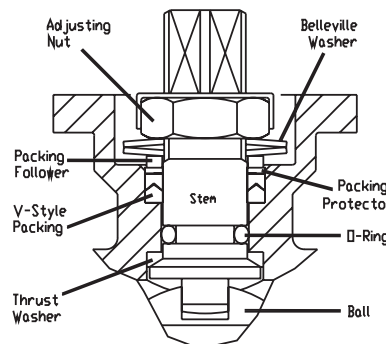

Pressure/Temperature Chart

